
Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

| sources | ELEGATED REGUL | -AHON (EU) 2019/2 | 2015 with regard to energ | gy labelling of light | | |
|--|------------------|-------------------------------|--|-----------------------|--|--|
| Supplier's name | e or trade mark: | LEDVANCE | | | | |
| Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany | | | | | | |
| Model identifie | r: AC33173 | | | | | |
| Type of light so | urce: | | | | | |
| Lighting technology used: | | LED | Non-directional or directional: | DLS | | |
| Light source cap-type (or other electric interface) | | Constant cur- rent: 440 mA | | | | |
| Mains or non-mains: | | NMLS | Connected light source (CLS): | No | | |
| Colour-tuneable light source: | | No | Envelope: | - | | |
| High luminance light source: | | No | | | | |
| Anti-glare shield: | | No | Dimmable: | No | | |
| | | Product para | | 1 | | |
| Parameter | | Value | Parameter | Value | | |
| | | General product p | 1 | | | |
| Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer | | 50 | Energy efficiency class | E | | |
| Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | | 5 600 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 | | |
| On-mode power (P _{on}), expressed in W | | 47,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 | | |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 80 | | |
| Outer dimen- | Height | 19 | Spectral power dis- | See image | | |
| sions without separate con- trol gear, light- ing control | Width Depth | 93 183 | tribution in the range 250 nm to 800 nm, at full-load | in last page | | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | | |
|--|-------|--|----------------|--|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | | |
| | | Chromaticity coordinates (x and y) | 0,382 0,380 | | | |
| Parameters for directional light sources: | | | | | | |
| Peak luminous intensity (cd) | 2 400 | Beam angle in degrees, or the range of beam angles that can be set | 105 | | | |
| Parameters for LED and OLED light sources: | | | | | | |
| R9 colour rendering index value | 0 | Survival factor | 0,90 | | | |
| the lumen maintenance factor | 0,96 | | | | | |

(a)'-': not applicable; (b)'-': not applicable;

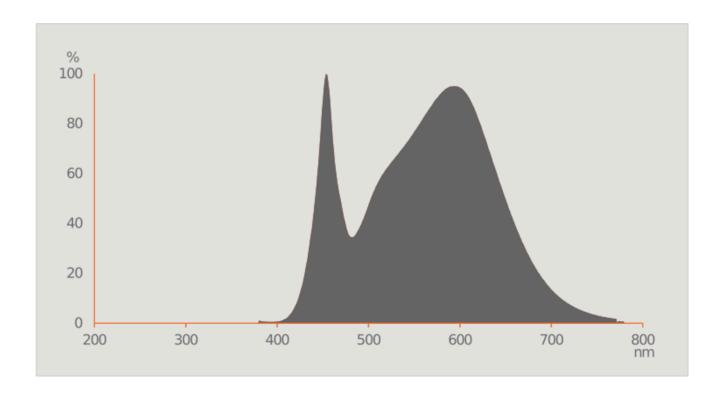

Model placed on the Union market from 09/09/2021



EPREL registration number: 608962 https://eprel.ec.europa.eu/qr/608962

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

Customer care service:

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany